

TECHNICAL DATA

Product type	Reverse osmosis watermaker
Application	Seawater for nautical application
Production	150 lit/h (39,6 Gal/h) @35ppm and 25°C
Membranes	2x Membrane SW-4021
Rejection	99,5% (nominal)
Recovery	15 %
Power supply	24V±15% DC 48V±15% DC 110V±15% AC - 60Hz 230V±15% AC - 50/60Hz
Absorption - Poer required	25A - 600W (24V) 13A - 600W (48V) 6A - 700W (110V) 3A - 700W (230V)
Pump	Rotary pump
Pressure pump	10 - 11 bar
Flow rate pump	15,6 – 16,6 l/min
Water inlet temperature range	8 - 30 °C
Pre-filtration	1x 5micron filter 10"x2-1/2" 1x Active carbon filter 2-7/8" x 9-3/4"
Shipping wight	94 kg
Shipping dimensions	88x64x69 cm



HYDRAULIC CONNECTIONES

PUMP / FILTERS / NR VALVE

Seawater inlet	Hose barb DN20/22 - DN20
Seawater outlet	Hose barb DN20/22 - DN20


WATERMAKER

Seawater inlet	Hose barb DN20/22
Concentrated water outlet	Hose barb DN16
Fresh water outlet	Serto ¼" - Hose 6x8


CONTROL SYSTEM AND OPTIONAL DEVICES

Electronics	Basic / Touch
Automatic flushing	Standard
Safety control	High/low pressure Low voltage
Salinity monitoring	N.A. (Basic) / Optional (Touch)


COMPONENTS




CONTROL PANEL (BASIC)
Depth: 3,6 cm
Cut dimensions: 7,6x4,4 cm




CONTROL PANEL (TOUCH)
Depth: 3,2 cm
Cut dimensions: 11x8,8 cm




NON RETURN VALVE
Depth: 4,7 cm




MESH FILTER GROUP
Depth: 9,1 cm

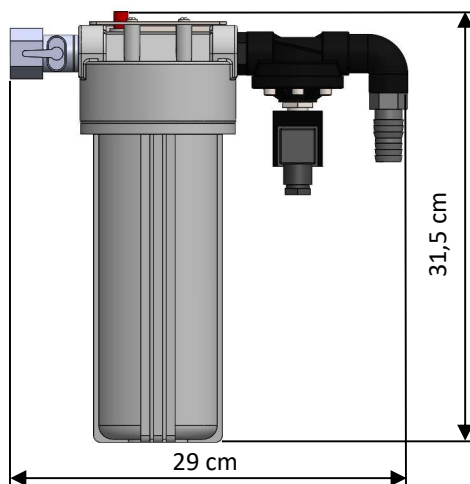


ACTIVE CARBON FILTER GROUP
Depth: 12,8 cm

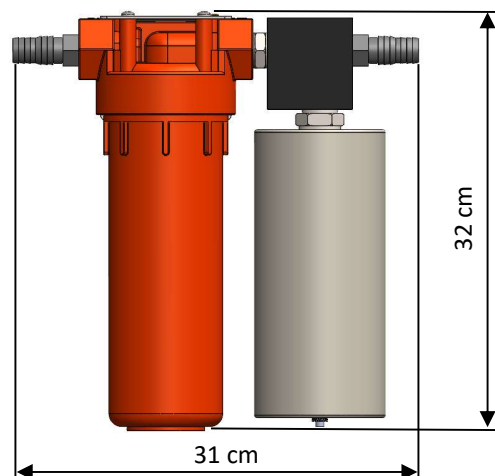


5 MICRON FILTER GROUP
Depth: 11,3 cm

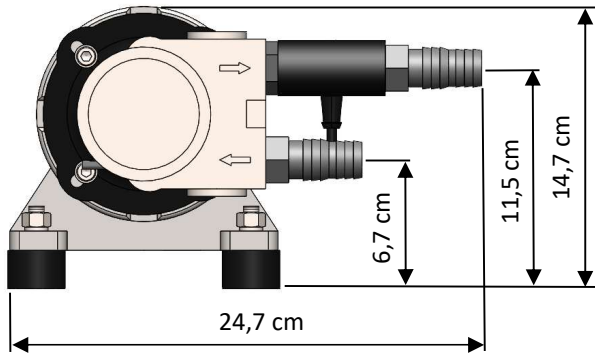


PUMP GROUP 24/48V
Depth: 41,2 cm - Weight: 12,7 kg

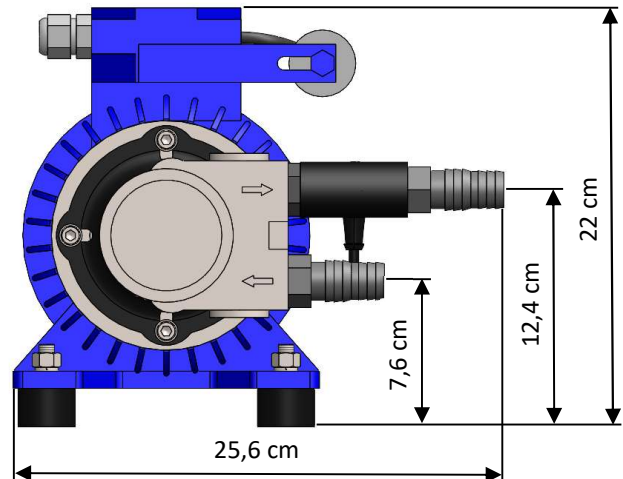


PUMP GROUP 230V
Depth: 43,2cm – Weight: 12,1kg

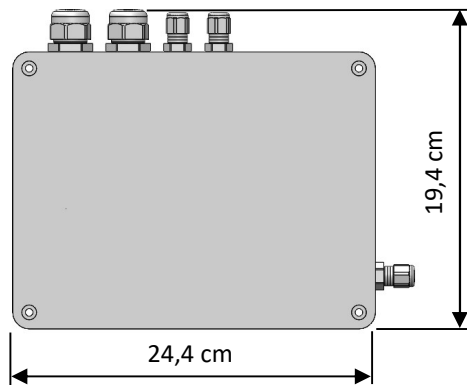

ELECTRICAL PUMP BOX
Depth: 10,6 cm

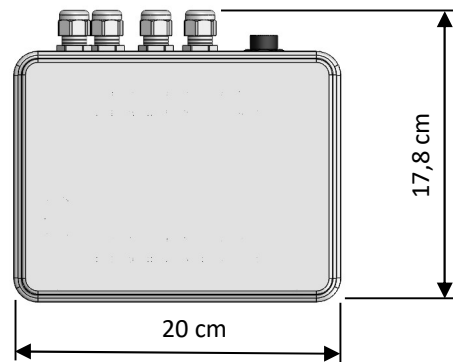


COMPUTER BOX (TOUCH)
Depth: 8 cm

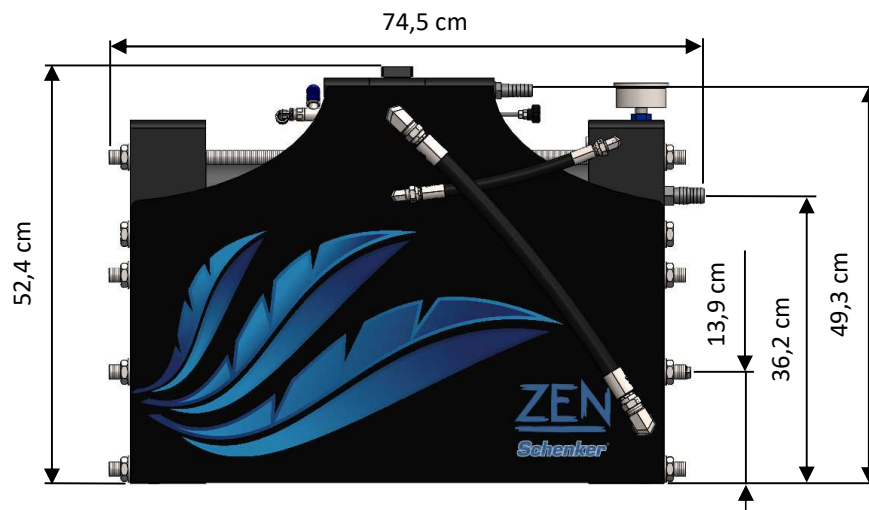

WATERMAKER
Depth: 19,6 cm - Weight: 47,9 kg

INSTALLATION SCHEME

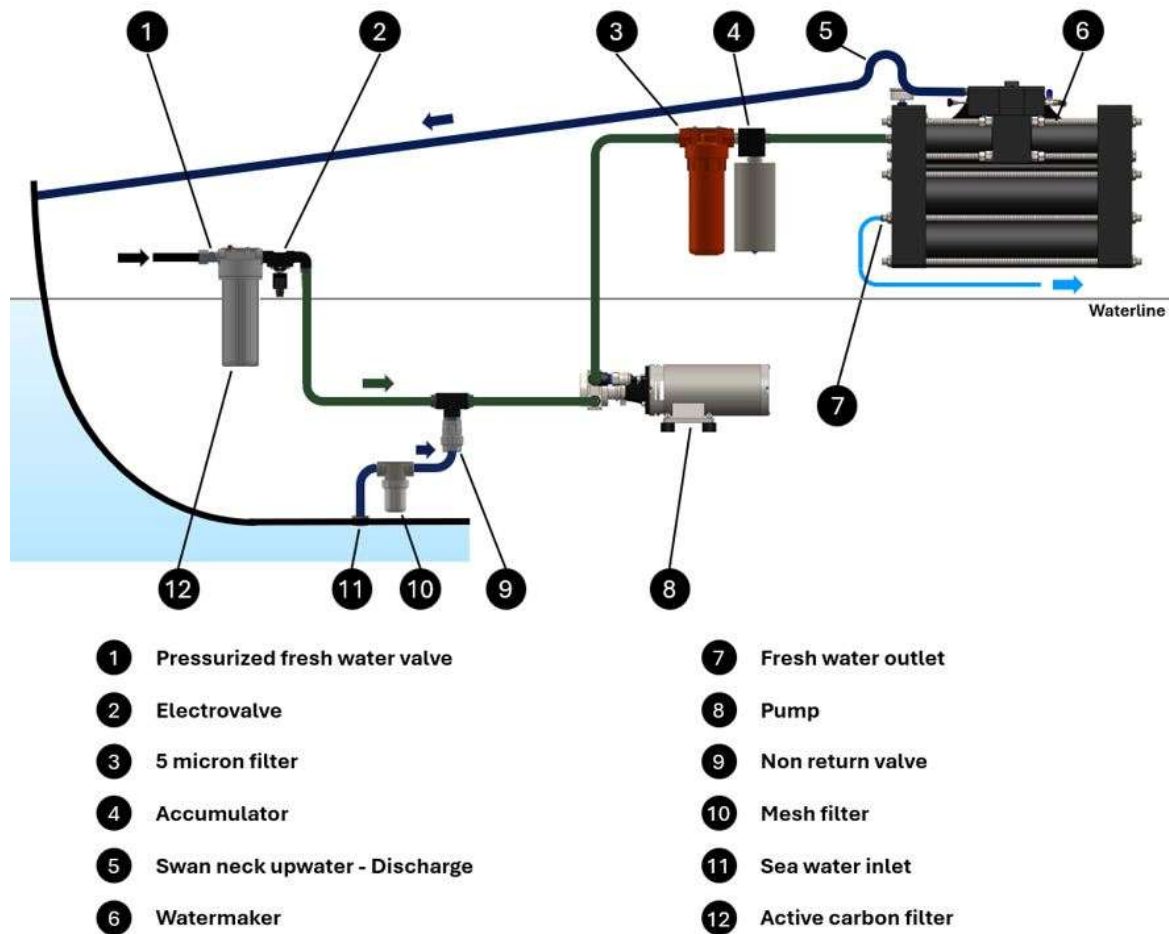

SCHENKER ITALIA s.r.l.

Via Ferrante Imparato, 499/501, Condominio Genesis
80146 NAPOLI – NA – Italia

Email: info@schenker.it

Web: <https://schenkerwatermakers.com/>

Tel. +39 0815593505 - 0815590931